

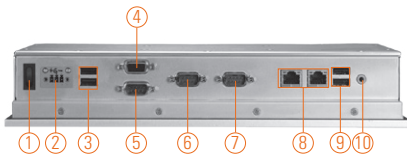


GOT3126T-834

12.1" XGA TFT Extended Temp. Fanless Touch Panel Computer with Intel® Atom™ Processor E3827 (-20°C +55°C)



- | | |
|---------------------------|---------------------------|
| 1. Power switch | 6. COM 1 (RS-232/422/485) |
| 2. DC power input | 7. COM 2 (RS-232/422/485) |
| 3. USB 2.0 x 2 | 8. Ethernet x 2 |
| 4. VGA | 9. USB 3.0 x 2 |
| 5. COM 3 (RS-232/422/485) | 10. Audio (Line-out) |

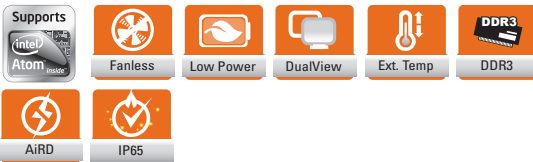

Introduction

The GOT3126T-834 adopts a 12.1-inch XGA 500 nits TFT LCD and supports Intel® Bay Trail processor. By supporting a wide range operating temperature from -20°C to +55°C, it can be used in harsh environment. The high brightness industrial panel PC supports low power Intel® Atom™ processor E3827. The industrial HMI can work under 1.3 G (10 ~ 500Hz, random for 2.5" HDD) in operation mode with a patent of anti-vibration design. It also provides two PCIe mini card slots for 3G, wireless network connectivity. The 12.1" fanless touch panel computer is suitable for transportation, heavy-duty industry, smart factory automation, and oil pipe monitoring systems.

Wide Temperature Range Support (-20°C to +55°C)

The Intel® Atom™-based GOT3126T-834 applies unique extended temperature technology with wide temperature range support as well as fanless operation. It also has a compact design for harsh environment.

WLAN Antenna Support (optional)

The 12.1" XGA IP65 industrial panel PC, GOT3126T-834, provides two PCIe mini card slots and WLAN/3G antennas for wireless network connectivity.

Features

- 12.1" XGA (1024 x 768) color TFT LCD display
- Fanless cooling system with Intel® Atom™ E3827 1.75 GHz
- Supports wide temperature range of -20°C ~ +55°C
- Supports 2 Gigabit LAN, 2 USB 3.0, 2 USB 2.0 & 3 COM ports
- Supports WLAN/3G module and antenna (optional)
- Supports dual Express Mini card slots
- 9~36VDC wide voltage and over current protection
- Supports panel mount and optional VESA arm, desktop stand, wall mount
- Supports 2.5" SATA HDD & CFast™ or mSATA
- Adjust RS-232/422/485 setting via BIOS



▲ Side view



▲ Rear view

Specifications

Front Bezel	IP65, NEMA 4 rugged protection, aluminum front bezel	
LCD Panel	Display Type	12.1" XGA TFT LCD
	Brightness (cd/m ²)	500 nits
	Resolution	1024 x 768
Main System	CPU	Intel® Atom™ processor E3827 2C @1.75 GHz (Bay Trail)
	Chipset	SoC Intergrated
	System Memory	1 x 204-pin DDR3L-1333/1600 SO-DIMM up to 8 GB
	BIOS	AMI UEFI BIOS
	Storage	1 x 2.5" SATA HDD 1 x CFast™ or 1 x mSATA
	Watchdog Timer	255 levels, 0~255 sec.
	Onboard Graphics	Integrated Intel® HD Graphic



Specifications

I/O Connector	3 x RS-232/422/485 (COM 1/2/3) 1 x VGA 1 x Audio (Line-out) 2 x USB 3.0 2 x USB 2.0 2 x 10/100/1000Mbps Ethernet
Expansion Interface	2 x PCIe Mini Card slots
Touchscreen	Resistive type
Power Supply	9-36V DC with power protection
Dimensions	311.5 mm (12.21") (W) x 56.9 mm (2.23") (D) x 250 mm (9.8") (H)
Packing Dimensions	525 mm (20.67") (W) x 186 mm (7.32") (D) x 470 mm (18.51") (H)
Weight (net/gross)	2.8 kg (6.17 lb) / 5 kg (11.02 lb)
Environment	Operating temperature: -20°C ~ +55°C (-4°F ~ +131°F) (with W.T. DRAM/HDD/CF) Storage Temperature: -30°C ~ +80°C (-22°F ~ +176°F) Relative humidity: 20% ~ 90% @ 40°C; non-condensing Operation vibration: 1.3G, 10 ~ 500Hz, random for 2.5" HDD 2G, 10 ~ 500Hz, random for CompactFlash™
Certificate	CE

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information

GOT3126T-834	12.1" XGA TFT fanless touch panel computer with Intel® Atom™ E3827 1.75 GHz dual core processor, resistive touch screen and 9-36VDC terminal block connector
--------------	--

* Specification and certifications are based on options and may vary.


Optional EOS Installation

WES7
WE8S

Optional OS Installation

Windows® 8.1
Windows® 7

Dimensions

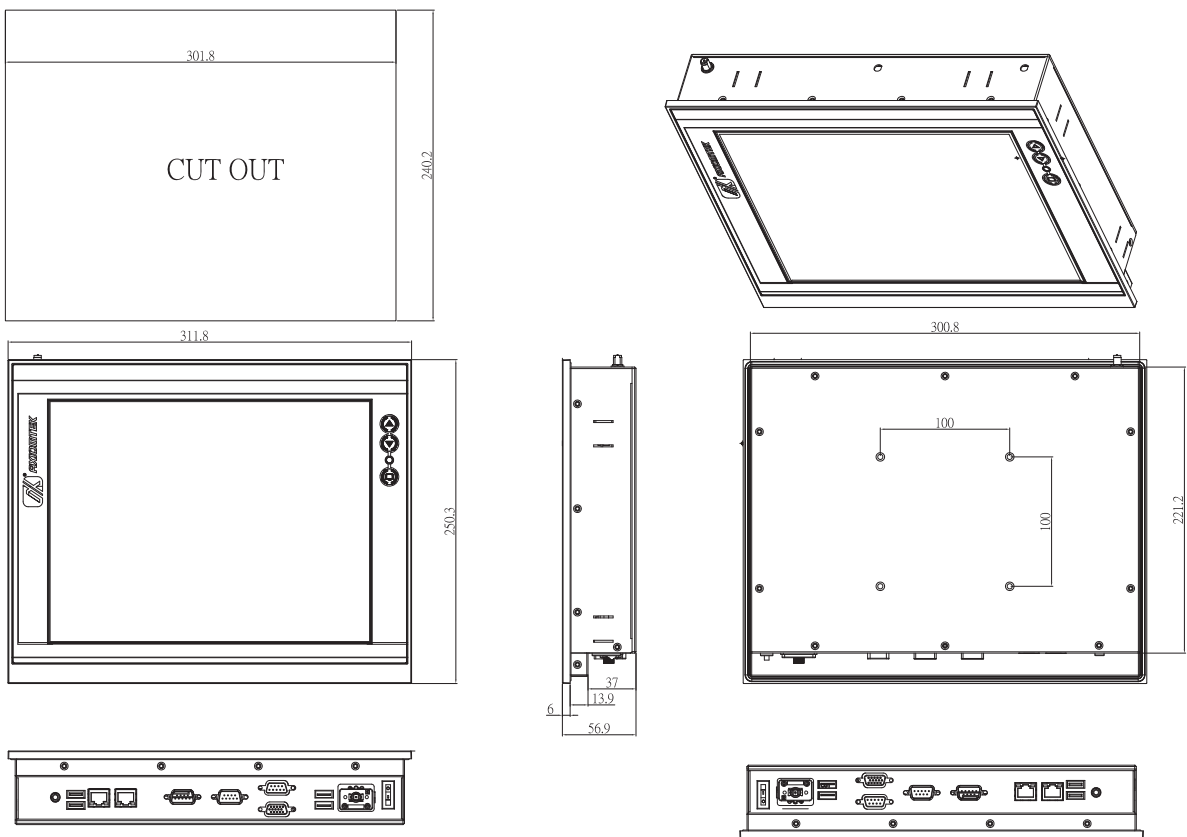

Overview

Fanless Touch Panel Computers

2

Heavy-duty Fanless Touch Panel Computers

Industrial Touch Panel Computers

Industrial Touch panel Monitors

Infotainment Touch Panel Computers

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories

