


AIE100-903-FL

Fanless Edge AI System with NVIDIA® Jetson Nano™ SoM, 1 HDMI, 1 GbE LAN, 1 GbE PoE, and 2 USB

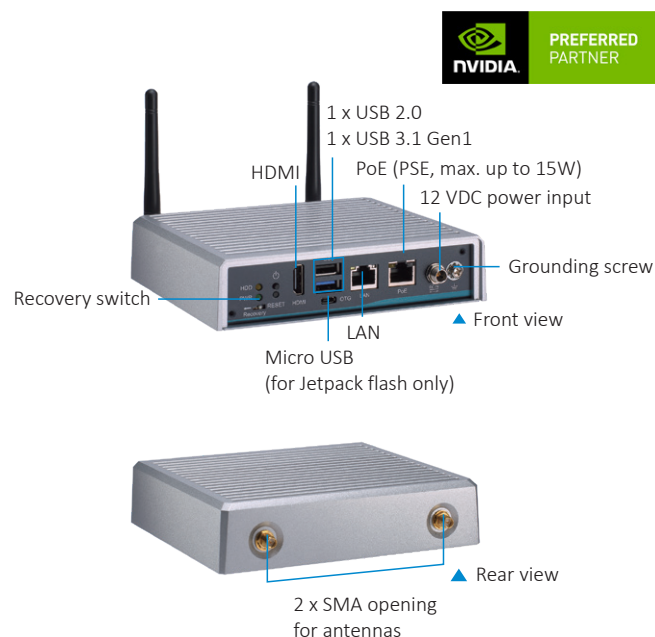

Features

- NVIDIA® Jetson Nano™, 128-core NVIDIA Maxwell™ GPU
- High AI computing performance for GPU-accelerated processing
- Ideal for edge AI smart city applications
- Optional IP42 cover kit for semi-outdoor applications
- Supports one 15W GbE PoE for camera
- Wide operating temperature from -30°C to +60°C
- JetPack supported

NVIDIA® Jetson Nano™ available through to 2027*

The official end of life notice will be sent for at least 8 months before the last shipment.



Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP40 (IP42 by optional cover kit)
AI Accelerator	NVIDIA® Jetson Nano™
CPU	Quad-core ARM® Cortex®-A57 MPCore processor
GPU	128-core NVIDIA Maxwell™ GPU
System Memory	4GB 64-bit LPDDR4 onboard
Carrier Board	SBC87903
System I/O Outlet	1 x HDMI 2.0 with 4K2K supported 1 x 10/100/1000 Mbps Ethernet (via Jetson Nano™) 1 x 10/100/1000 Mbps PoE (Intel® I210-IT ;max. up to 15W) 1 x USB 3.0, 1 x USB 2.0 1 x Micro USB for image flash 1 x Recovery switch 1 x Reset button 1 x Power button 1 x 12 VDC power input connector 2 x SMA-type antenna connector
Watchdog Timer	Built-in Nano
Storage	Onboard 16GB eMMC (via Jetson Nano™) 1 x M.2 Key M 2280 with PCIe x4 NVMe SSD slot 1 x Micro SD slot *The bootable device supported by eMMC only
Expansion Interface	1 x Full-size PCI Express Mini Card slot (USB + PCI Express signal) 1 x SIM slot
System Indicator	1 x Green LED for system power-on 1 x Yellow LED for M.2 storage
Power Supply	12 VDC screw type

Specifications

Operating Temperature	-30°C to +60°C (-22°F to +140°F)
Humidity	10%- 95%, non-condensing
Vibration Endurance	3 Grms with M.2 (5 to 500Hz, X, Y, Z directions)
Dimensions	148.6 mm (5.85") (W) x 129.8 mm (5.11") (D) x 34.6 mm (1.36") (H)
Weight (net/gross)	1 kg (2.20 lb)/ 1.6 kg (3.52 lb)
Certifications	CE, FCC Class A
OS Support	Linux Ubuntu 18.04

Remote Management Enrollment

Enroll in 24/7 secure service to get full feature of remote device management on one centralized cloud portal – Allxon Portal

*Enrollment Page: https://allxon.com/jetson/device_enroll/

Packing List

1 x Screw pack

4 x Foot pad

Power Protection

AC to DC Adapter

OVP (over voltage protection)

OCP (over current protection)

UVP (under voltage protection)

SCP (short circuit protection)

Ordering Information

Standard

AIE100-903-FL	Fanless edge AI system with NVIDIA® Jetson Nano™ SoM, 1 HDMI, 1 GbE LAN, 1 GbE PoE and 2 USB
---------------	--

Optional

8817H1003A0E	Wall mount kit
--------------	----------------

8817H1001A0E	DIN-rail kit
--------------	--------------

8817H1006A0E	VESA mount kit
--------------	----------------

8817H1002A0E	IP42 cover kit
--------------	----------------

M.2 NVMe SSD 128GB or above	
-----------------------------	--

LTE module	
------------	--

Wi-Fi module	
--------------	--

Power cord	
------------	--

50966124050E	12V/60W adapter
--------------	-----------------

* Specifications and certifications may vary based on different requirements.

Dimensions

